


ECONOMICAL AND SUSTAINABLE ALTERNATIVE TO NEW SF₆ GAS

SF₆ gas is indispensable for safe operation of SF₆-filled switchgear. However, it may occur that the SF₆ quality is outside the required standards and the gas therefore has to be replaced, or a switchgear is decommissioned and you cannot continue to use the gas for the maintenance of other switchgear. But every kilo of new SF₆ gas produced and used SF₆ gas disposed of means further emissions and an additional environmental impact. DILO now offers an economical and sustainable alternative to filling your SF₆-filled switchgear in a safe and emission-free way:

DILO CERTIFIED SF₆ GAS

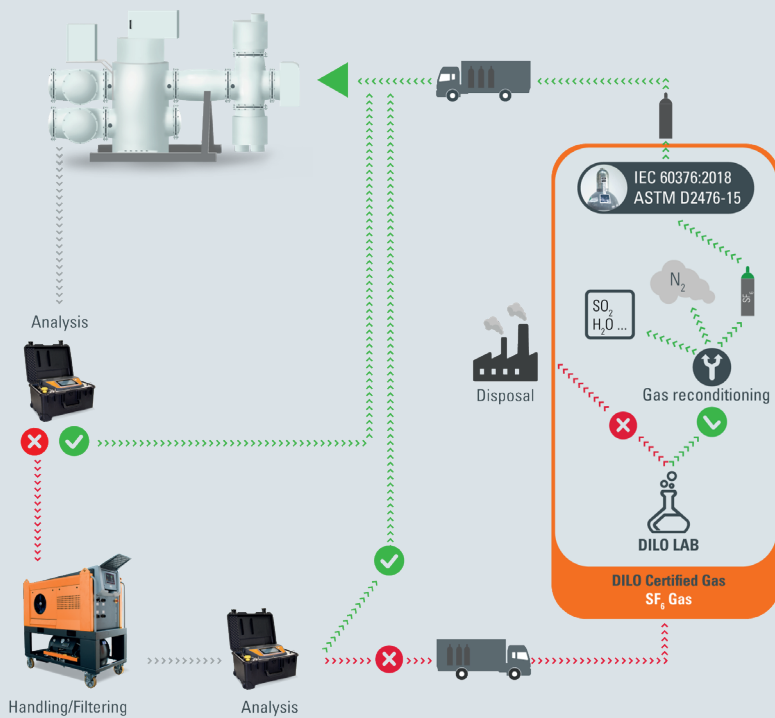

DID YOU KNOW?

- DILO Certified SF₆ Gas is proven to exceed the quality standards for new SF₆ gas.
- DILO is able to recondition SF₆ with an SF₆ gas content of at least 40 %.
- DILO accepts SF₆ gas with an SO₂ content of up to 250 ppmv for reconditioning.
- DILO also organises the collection or return transport of your SF₆ gas on request.

Subject to change without any notice. © Copyright DILO





THE 'WIN-WIN' ALTERNATIVE TO NEW SF₆ GAS

The idea behind DILO Certified SF₆ Gas is very simple: Instead of producing and circulating new SF₆ gas or destroying used gas, SF₆ gas that is no longer useable is reconditioned.

As a TÜV SÜD-certified waste management company, DILO uses a cryogenic separation process to recondition used SF₆ gas, in which by-products are separated by using pressure and cold via various stages. What remains is pure SF₆ gas, which can then be used again.

We offer you the entire process from collection of the used SF₆ gas to reconditioning and testing in our in-house laboratory to return transport. For a minimum quantity of 2 tonnes, the used SF₆ gas can also be reconditioned on site.

Substance	DILO „Certified Gas“ quality	IEC 60376:2018 (New gas)	ASTM D2472-15
SF ₆	> 99,9 vol.-% (> 99,99 wt%)	> 98,5 vol.-%	≥ 99,8 weight-%
H ₂ O	≤ 8 µl/l	< 200 µl/l	≤ 8 ul/l
Frost point (1 atm)	≤ -62 °C	-36 °C	-62 °C
Total acidity (HF equivalent)	< 0.1 µl/l	< 7 µl/l	≤ 0.3 ppm _w
Air	< 500 µl/l	< 10.000 µl/l	≤ 500 ppm _w (2500 µl/l)
CF ₄	< 500 µl/l	< 4.000 µl/l	≤ 500 ppm _w (830 µl/l)
Oil mist	< 1 mg/kg	< 10 mg/kg	–
SO ₂	< 0.1 µl/l	–	–

YOUR BENEFITS AT A GLANCE

- **Low costs**
No costs for new SF₆ gas, no costs for the disposal of used SF₆ gas.
- **Avoiding taxes**
No CO₂ taxes for the import of new SF₆ gas, no regional taxes when using new SF₆ gas.
- **Effective environmental protection**
No resource consumption for the production of new SF₆ gas, no environmentally harmful disposal of used SF₆ gas.
- Collection / dispatch in vessels rented or purchased from DILO or customer's own pressure vessels.



www.dilo.eu

For more information about DILO Certified Gas please refer to www.dilo.eu

